

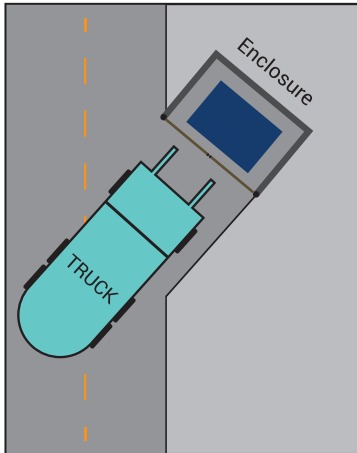


## DIRECT ACCESS

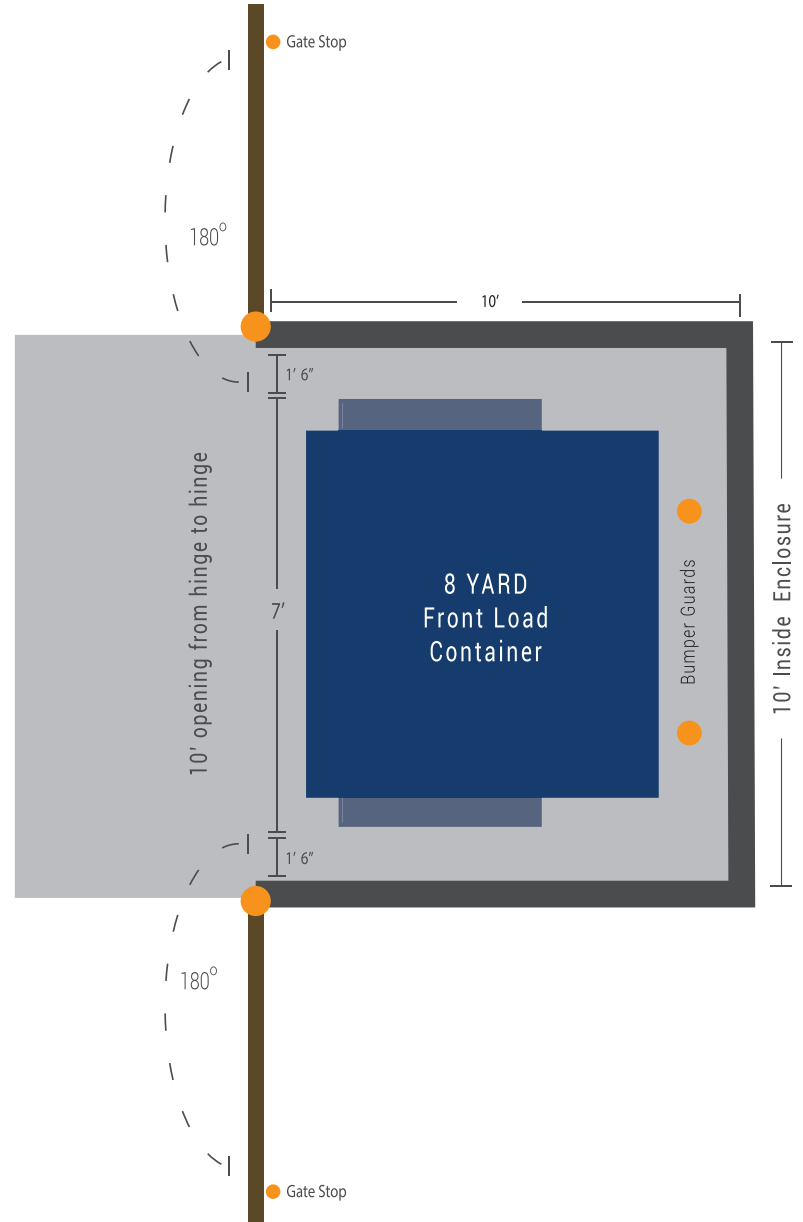

## NON-DIRECT ACCESS

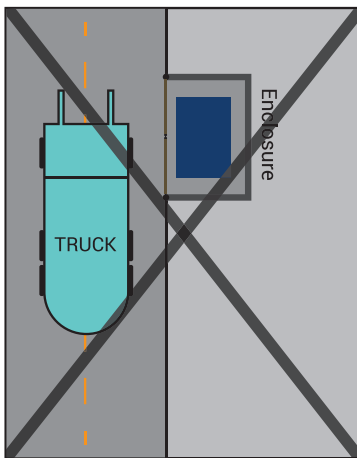

**Gate Opening** - Not all containers have wheels. The truck will need room to drive into the enclosure to dump the container. Gate openings should have a minimum of a 10 foot opening. Hinges should be on the outside of the wall.

**Gate Stops** - Please put in gate stops to hold gate open when we dump the container.

**Depth of Enclosure** - Allow a minimum of 10 feet for a front load container and a minimum of 16 feet for rear load containers. These measurements (diagram above) allow for an 8 yard container. Enclosure depth can

be smaller for smaller containers. Consult your account manager to determine what type of container and enclosure depth you will need.

**Truck Access** - Please leave about 40 feet of unobstructed clearance in front of the enclosure to allow truck direct access.

**Extras** - Allow extra space for grease containers and other items. Leave room for employees to walk on every side of the container. A side opening is also recommended so employees do not have to open the large entry door.

**Building material** - Chain link is recommended because the hinges are adjustable as the ground settles. Consult your municipality for fencing and height requirements. There should be a 6 inch thick concrete pad in the enclosure and at least 8 feet in front of the opening. This helps to reduce damage to both the pavement and the trucks.

*Please contact your account representative with any questions.*